

Dreamscapes pavers are designed for commercial and residential installations in all climates. The recycled content is maximized while maintaining a uniform look throughout the color lines. These hi-fired porcelain pavers offer superior density and unmatched performance. Perfect for driveways, entrance-ways, pool decks, patios, promenades, public spaces, steps and walkways

straight edge in multiple sizes

travertine



ivory

silver

navona

limestone



ivory

silver

light coffee

grey

quartz



ivory

silver

grey

nextone




light grey

dark ash


black

12"x24" pool copings

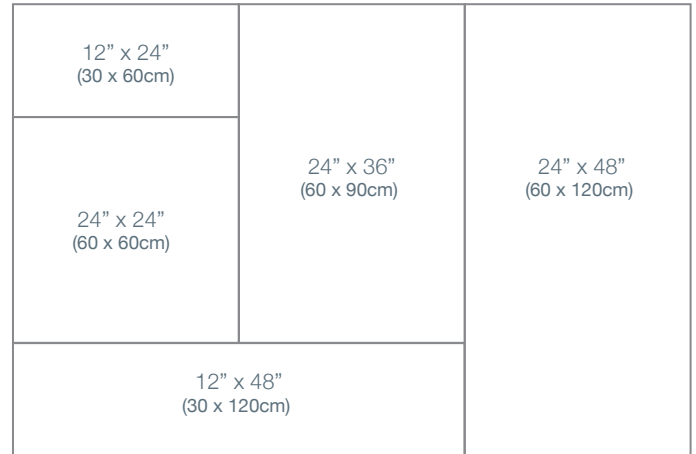

Check with your sales representative for specific stock sizes and colors.

tumbled edge in 16"x24"

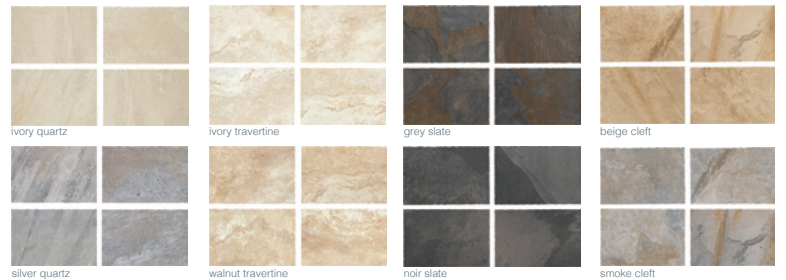

ivory quartz

ivory travertine

grey slate

beige cleft

silver quartz

walnut travertine

hair slate

smoke cleft



Easy Installation – dreamscapes are specifically designed for quick and easy installation with multiple setting options.



Resistant – High compressive strength and low absorption rates create a dense surface that resists mold, moss, dirt and staining.



Skid-resistant – Structured paver top textures feature non-slip surfaces contributing to superior safety conditions.



Color Durability – Our extensive selection of color, fused by vitrification is not affected by external elements.



Freeze Resistant – 100% frost-free at temperatures as low as -60°F.



Durable – Pavers withstand loads of up to 2,200 lbs. and are engineered for reduced breakage.



Stylish – Available in a diverse range of contemporary colors and designs.



Modular Design – Precision rectified for easy installation allow creative designs utilizing multiple size slabs in homogeneous patterns.



Light Weight – 37 lbs. for the 24" x 24" paver permit easy installation, removal and serviceability (excluding adhered installations).



Easy to clean–Dreamscapes may be washed with low pressure washing device. Standard household cleaners can be used.



Size Uniformity – All slabs are precision rectified to insure consistency and faster installation process.



Impermeable – De-icing salts and other equivalent materials can be used without concerns.



Ramp Skid Coefficient – Barefoot Ramp, Shod Ramp and Pendulum Friction tested. Rated R-11.



SRI Value – ASTM E903 – 35 to 67